




PRODUCT INFORMATION

DuPont™ Tyvek® 400 Sleeve. 18" Long. Elastic at Both Ends. Serged Seams. White.

ATTRIBUTES

Full Part Number	TY500SWHxx0200yy (xx=size;yy=option code) ?
Fabric/Materials	Tyvek® 400
Design	Sleeve
Seam	Serged
Color	White
Quantity/Box	200 per case
Sizes	00
Option Codes	00,NF

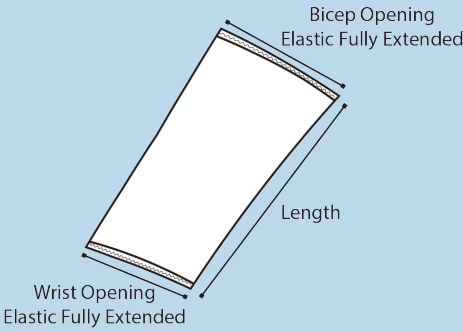

SIZE TABLE

SIZE	INSEAM	WAIST OPENING
UNI		
SM	27	22
MD	27 1/2	23 1/2
LG	28	24 3/4
XL	28 3/4	25 1/2
2X	29 1/2	26 1/2
3X	30	27 1/2
4X	30 3/4	28 1/4
5X	31 1/4	29
6X	32	29 3/4
7X	32 1/4	30 1/2

PHYSICAL PROPERTIES

PROPERTY	TEST METHOD	TYPICAL RESULT
Thickness	ASTM D1777	5.9 mils
Basis Weight	ASTM D3776	1.2 oz/yd ₂
Burst Strength - Mullen	ASTM D774	50 psi
Seam Strength	ASTM D1683	> 19 lb _f
Breaking Strength - Grab (MD)	ASTM D5034	18 lb _f /in
Breaking Strength - Grab (CD)	ASTM D5034	22 lb _f /in
Hydrostatic Head	AATCC 127	45 inches H ₂ O
Surface Resistivity (25°C / 55% RH)	ASTM D257	< 6.3 x 10 ⁹ ohms /square
Wearing Apparel Flammability	16 CFR 1610 	Class 1

DuPont™ SafeSPEC™ - We're here to help

Our powerful web-based tool can assist you with finding the appropriate DuPont garments for chemical, controlled environment, thermal and mechanical hazards.

safespec.dupont.com



DuPont Personal Protection
safespec.dupont.com
dpp.dupont.com

 DuPont Personal Protection

 @DuPontPPE

Connect with us  

CREATED ON: NOVEMBER 26, 2021

© 2021 DuPont. All rights reserved. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted.