
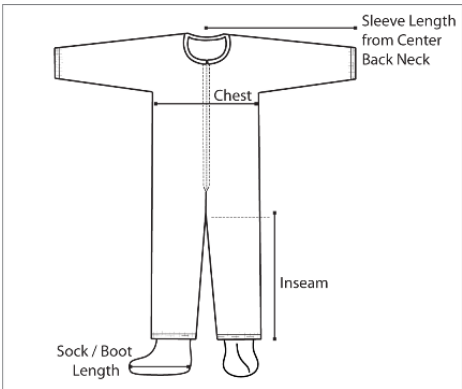


DUPONT™ TYVEK® 400 SFR



DuPont™ Tyvek® 400 SFR Coverall. Relaxed Fit Design. Standard Fit Hood. Storm flap. Red Zipper. Elastic Wrists and Ankles. Red External Serged Seams. White.

| | |
|------------------|---|
| Full Part Number | ST127SWHxx0025yy (xx=size;yy=option code)  |
| Fabric/Materials | Tyvek® 400 SFR |
| Design | Coverall w/ Hood, Elastic Wrists and Ankles |
| Seam | Serged (external), red |
| Color | White |
| Quantity/Box | 25 per case |
| Sizes | MD, LG, XL, 2X, 3X, 4X, 5X, 6X, 7X |
| Option Codes | 00 |




SIZE TABLE

| | | | | | |
|----|--------|--------|--------|-----------------|--------------|
| MD | 33 3/4 | 24 1/4 | 28 | 35 1/4 - 38 3/4 | 5'3" - 5'7" |
| LG | 35 | 25 3/4 | 28 7/8 | 38 1/4 - 41 3/4 | 5'5" - 5'9" |
| XL | 36 1/2 | 27 1/4 | 29 1/4 | 41 1/4 - 44 3/4 | 5'8" - 6'2" |
| 2X | 38 | 28 1/2 | 30 3/8 | 43 3/4 - 47 1/4 | 6'0" - 6'4" |
| 3X | 38 1/2 | 30 3/4 | 31 1/4 | 48 1/4 - 51 3/4 | 6'2" - 6'4" |
| 4X | 39 1/4 | 32 1/8 | 32 3/8 | 51 - 54 1/2 | 6'4" - 6'7" |
| 5X | 40 1/2 | 33 3/4 | 33 3/8 | 54 1/4 - 57 3/4 | 6'7" - 6'10" |
| 6X | 41 3/8 | 35 3/8 | 34 1/2 | 57 1/2 - 61 | 6'9" - 7'1" |
| 7X | 42 1/4 | 37 | 35 3/8 | 60 3/4 - 64 1/4 | 7'0" - 7'4" |

DUPONT™ TYVEK® 400 SFR

PHYSICAL PROPERTIES

| | | |
|-------------------------------|---|-------------------------|
| Thickness | ASTM D1777 | 6.3 mils |
| Basis Weight | ASTM D3776 | 2.0 oz/yd ² |
| Burst Strength - Mullen | ISO 2758 | 65.3 psi |
| Seam Strength | ASTM D1683 | 34 lb _f |
| Breaking Strength - Grab (MD) | ASTM D5034 | 28.7 lb _f |
| Breaking Strength - Grab (CD) | ASTM D5034 | 31.5 lb _f |
| Water Impact Penetration | AATCC 42 | <0.2 g H ₂ O |
| Wearing Apparel Flammability | 16 CFR 1610  | Class 1 |

WARNING

*Serged and bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.


*Liquid barrier performance varies based on the amount of liquid that may get on the garment, the length of time the liquid is on the garment, applied pressure and certain physical properties of the liquid. Tyvek®400, Tyvek® 400 D, Tyvek® 400 SFR, ProShield® 6 SFR, ProShield® 10, ProShield® 60, Tyvek® 400 FC, and ProShield® 70 garments are not appropriate if during use they are getting wet (liquid is dripping or running, or it is wet to the touch) or if spotting is observed on skin or garments worn under the protective garment. In applications where a higher liquid barrier is needed, consider Tychem® 2000 SFR garments with taped seams.



*CAUTION: This information is based upon technical data that DuPont believes to be reliable. It is subject to revision as additional knowledge and experience are gained. DuPont makes no guarantee of results and assumes no obligation or liability in connection with this information. It is the user's responsibility to determine the level of toxicity and the proper personal protective equipment needed. The information set forth herein reflects laboratory performance of fabrics, not complete garments, under controlled conditions. It is intended for informational use by persons having technical skill for evaluation under their specific end-use conditions, at their own discretion and risk. Anyone intending to use this information should first verify that the garment selected is suitable for the intended use. In many cases, seams and closures have shorter breakthrough times and higher permeation rates than the fabric. Please contact DuPont for specific data. If fabric becomes torn, abraded or punctured, or if seams or closures fail, or if attached gloves, visors, etc. are damaged, end user should discontinue use of garment to avoid potential exposure to chemical. Since conditions of use are outside our control, DuPont makes no warranties, express or implied, including, without limitation, no warranties of merchantability or fitness for a particular use and assume no liability in connection with any use of this information. This information is not intended as a license to operate under or a recommendation to infringe any patent or technical information of DuPont or others covering any material or its use.

Tyvek® shoe covers with skid-resistant material on the soles, or Tyvek® garments with attached skid-resistant shoe covers might contain silicone in the sole substrate. This includes styles TY122, TY121, TY454, FC450 and FC454. End users who are consuming these styles and who have concerns about silicone contamination should conduct their own testing to ensure they are suitable for their application(s).


DuPont™ SafeSPEC™ - We're here to help


Our powerful web-based tool can assist you with finding the appropriate DuPont garments for chemical and controlled environment hazards.





DuPont Personal Protection
SafeSPEC™

 DuPont Personal Protection

 DuPont Personal Protection

CREATED ON: FEBRUARY 28, 2025

© 2024 DuPont. All rights reserved. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted.